


KENZAI CERAMICS

EXTRUDED TILE

ASU-PACIFIC DEVELOPMENT
CENTER ON DURABILITY

P.53

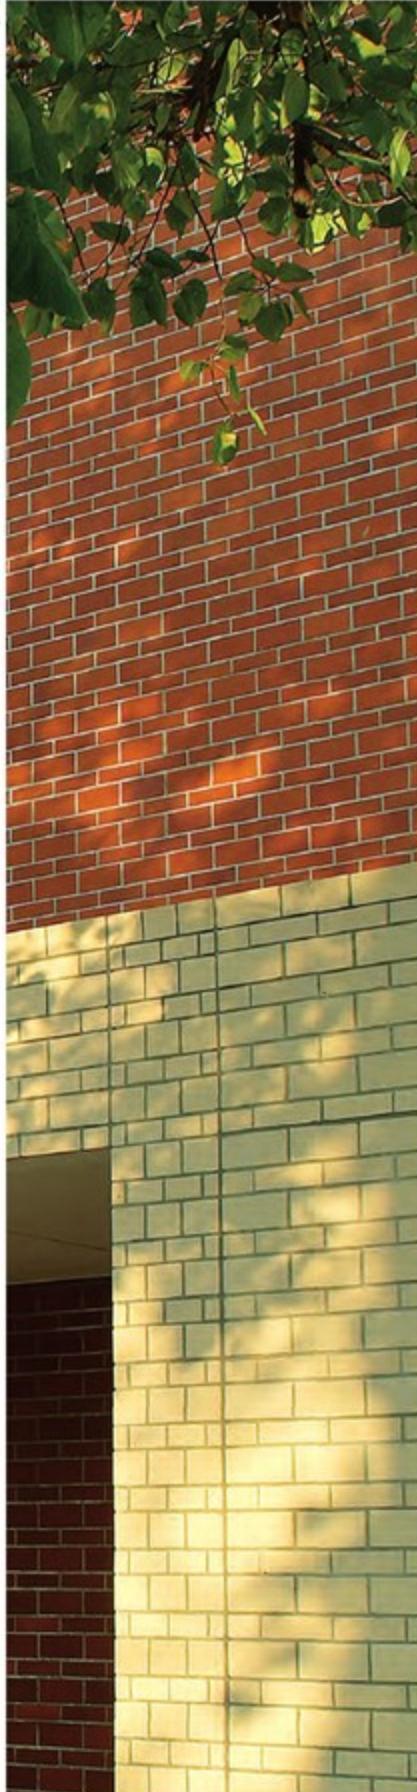

08

EXTRUDED TILE

Extruded Tile – has been fired at 1,250 ° degree Celsius, which makes it stronger than other extruded tiles in the market. It can be decorated for both floor and wall. It is qualified for heavy duty usage such as car park and withstanding acid and base while maintaining warmth in a classic European style.



Interior wall
Installation



Exterior wall
Installation



Interior floor
Installation



Exterior floor
Installation



Staircase
Installation



Installation
with joint




KENZAI CERAMICS

08


EXTRUDED TILE

| F-206




60 mm. x 210 mm. x 16 mm.
65 Pcs. / Sq.M.
50 Pcs. / Ctn.
0.77 Sq.M. / Ctn.

| F-201




100 mm. x 210 mm. x 16 mm.
40 Pcs. / Sq. M.
30 Pcs. / Ctn.
0.75 Sq.M. / Ctn.

| F-606



150 mm. x 150 mm. x 16 mm.
38 Pcs. / Sq. M.
20 Pcs. / Ctn.
0.53 Sq.M. / Ctn.

| F-202

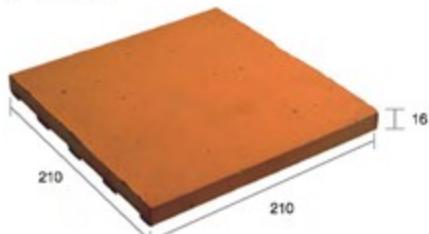


210 mm. x 210 mm. x 16 mm.
21 Pcs. / Sq. M.
10 Pcs. / Ctn.
0.48 Sq.M. / Ctn.

P.55




KENZAI CERAMICS

| F-101




100 mm. x 100 mm. x 16 mm.
80 Pcs. / Sq. M.
60 Pcs. / Ctn.
0.75 Sq.M. / Ctn.

| L-106




45 mm. x 60 mm. x 100 mm. x 16 mm.
15 Pcs. / M.
80 Pcs. / Ctn.
5.33 M. / Ctn.

| L-108




45 mm. x 60 mm. x 210 mm. x 16 mm.
15 Pcs. / M.
40 Pcs. / Ctn.
2.67 M. / Ctn.

| F-106




60 mm. x 100 mm. x 16 mm.
130 Pcs. / Sq.M.
100 Pcs. / Ctn.
0.77 Sq.M. / Ctn.

| C-206

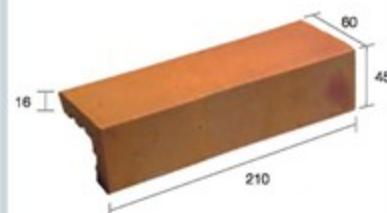

45 mm. x 60 mm. x 210 mm. x 16 mm.
5 Pcs. / M.
30 Pcs. / Ctn.
6.00 M. / Ctn.

| S-201

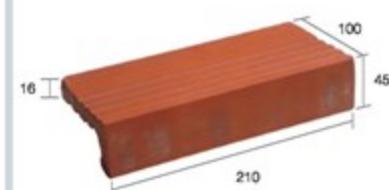

45 mm. x 100 mm. x 210 mm. x 16 mm.
5 Pcs. / M.
20 Pcs. / Ctn.
4.00 M. / Ctn.

EXTRUDED TILE

08

P.56



Interior wall
installation



Exterior wall
installation



Interior floor
installation



Exterior floor
installation



Staircase
installation




Installation
with joint




KENZAI CERAMICS

R




45 mm. x 100 mm. x 155 mm. x 16 mm.
10 Pcs. / M.
18 Pcs. / Ctn.
1.80 M. / Ctn.

M



45 mm. x 100 mm. x 100 mm. x 16 mm.
10 Pcs. / M.
60 Pcs. / Ctn.
6.00 M. / Ctn.

L



45 mm. x 100 mm. x 210 mm. x 16 mm.
10 Pcs. / M.
18 Pcs. / Ctn.
1.80 M. / Ctn.

*Remark Pieces per Square Meter is
calculated based on 1 cm. joint installation



Interior wall
Installation



Exterior wall
Installation



Interior floor
Installation



Exterior floor
Installation



Installation
with joint



Staircase
Installation

P.57



KENZAI CERAMICS

COLORS

WHITE



SILVER GREY



WINE RED



BRICKY BROWN



CHARCOAL



*Remark Actual colors may vary slightly from the pictures

EXTRUDED TILE

08


P.58



KENZAI CERAMICS



F-206 - WINE RED

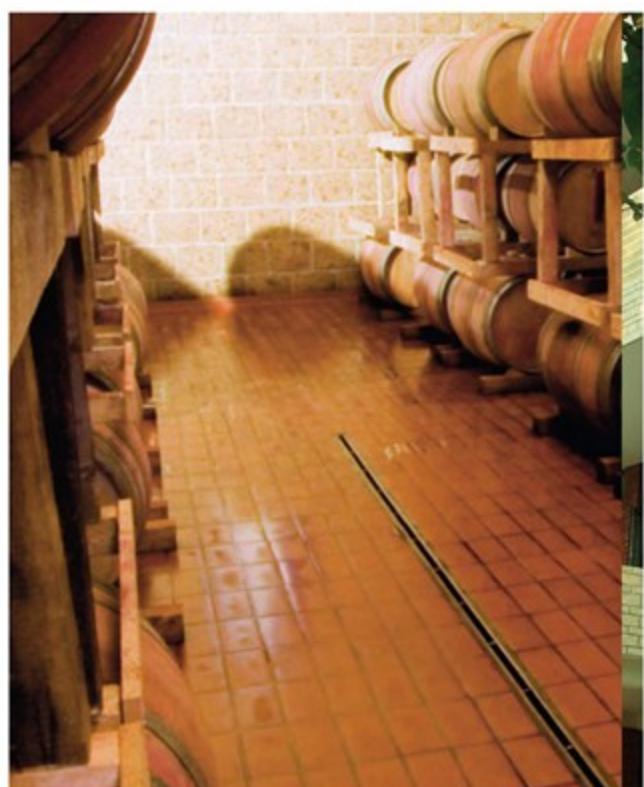

JOB REFERENCES



F-201 - WHITE



F-201 - WHITE, WINE RED, F-206 - WHITE, WINE RED

EXTRUDED TILE

KENZAI CERAMICS

EXTRUDED TILE

08

P.60